



ENERG

енергия · ενεργεια



10072241

alpha innotec

WZSV62K3M



Two icons showing sound waves emanating from a house. The top icon is labeled **44** dB. The bottom icon is labeled **-** dB.



- 6 kW
- 6 kW**
- 6 kW

An icon showing a clock face with a dashed line and a stack of coins with an arrow pointing down, representing energy consumption or cost.





ENERGY

10072241

alpha innotec

WZSV62K3M

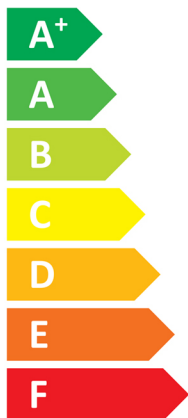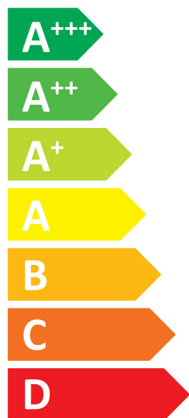

Two icons showing sound power level: a speaker inside a house and a house with a speaker. The first icon is labeled "44 dB" and the second is labeled "- dB".



Three icons representing power output, each with a square and the text "6 kW". The squares are dark blue, medium blue, and light blue.

An icon showing a clock face with a dashed line and a stack of coins with an arrow pointing down, symbolizing energy savings.



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

10072241

alpha innotec

WZSV62K3M + Luxtronik 2.1

Energy label for heating system showing a boiler icon, a radiator icon, and a tap icon with 'XL' label. The energy efficiency class is A+++ for the radiator and A for the tap.

Energy efficiency scale for heating system. The scale ranges from A+++ (green) to G (red). A black arrow points to A+++.

Energy label for water heating system showing a solar panel icon, a water tank icon, a control panel icon, and a boiler icon. Each icon is followed by a plus sign and a square box. The control panel box contains an 'X'.

Energy efficiency scale for water heating system. The scale ranges from A+++ (green) to G (red). A black arrow points to A.

package (heat pumps and combination heater with heat pump) WZSV62K3M + Luxtronik 2.1

Seasonal space heating energy efficiency of heat pump (η_s)

① 150 %

Rated heat output of the heat pump (P_{rated} kW)

6

Temperature control

Class

VII (Table 1)

+

② 3,5 %

Supplementary boiler

package with hot water storage tank

no

P_{sup} kW (rated heat output of supplementary heater)

η_s % (σ_{π})

$(\eta_s \% (sup) - ①) \times (\alpha_{WP}) = -$ ③ %

(α_{WE} : see Table 3)

(α_{WE})

solar contribution

(A_{Koll} m²)

(η_{Koll} %)

(V_{Sp} m³)

(standstill heat loss of the hot water storage tank in W)

(η_{Sp} : Table 2)


$((294/P_{rated} \times 11) \times (A_{Koll} \text{ m}^2) + (115/P_{rated} \times 11) \times (V_{Sp} \text{ m}^3)) \times 0,45 \times ((\eta_{Koll} \%)/100) \times (\eta_{Sp}) = +$ ④ %

Seasonal space heating energy efficiency of package

⑤ 153 %

rounded to the nearest integer

Seasonal space heating energy efficiency class of package

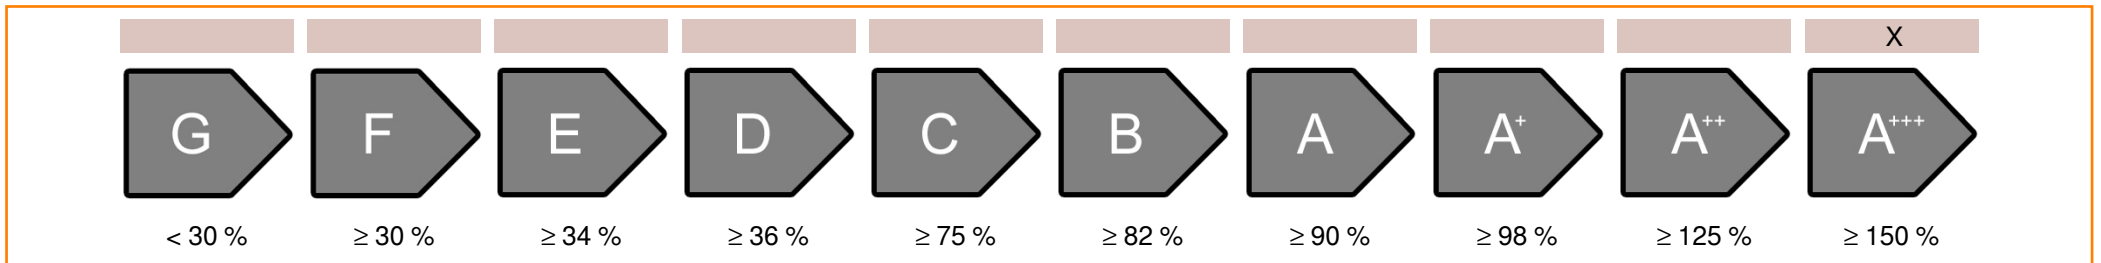

Seasonal space heating energy efficiency under colder or warmer climate conditions

Seasonal space heating energy efficiency of the heat pump (η_s) under colder climate conditions

157 %

Seasonal space heating energy efficiency of the heat pump (η_s) under warmer climate conditions

151 %

colder ⑤ 153 -V -7 = 160 warmer ⑤ 153 +VI 1 = 154

heatpump datasheet:			
manufacturer:	alpha innotec		
model:	WZSV62K3M		
Information concerning energy efficiency class and rated heat output:			
load profile water heating	XL		-
	average / low	average / medium	
energy efficiency class space heater:	A+++	A+++	-
energy efficiency class waterheating	A		-
rated heat output:	6	6	kW
annual final energy consumption space heater	2192	2878	kWh
annual electricity consumption waterheating	1642		kWh
energy efficiency space heater:	199	150	%
energy efficiency waterheating	102		%
sound power level indoors	44		dB
special precautions concerning assembly, installation or maintenance			
All instructional work in this manual may only be carried out by qualified specialist personnel in compliance with local regulations.			
additional information	low	medium	
rated heat output colder climate	6	6	kW
rated heat output warmer climate	6	6	kW
annual energy consumption space heater colder climate	2482	3288	kWh
annual energy consumption space heater warmer climate	1402	1851	kWh
ann. Electricity consumption waterheating colder climate	1642		kWh
ann. Electricity consumption waterheating warmer climate	1642		kWh
energy efficiency space heater colder climate	210	157	%
energy efficiency space heater warmer climate	202	151	%
energy efficiency waterheating colder climate	102		%
energy efficiency DHWarmer climate	102		%
sound power level outdoors	-		dB

technical data of the temperature controller		
manufacturer:	alpha innotec	
model:	Luxtronik 2.1	
controller class	VII	-
contribution of the controller to the energy efficiency space heater	3,5	%

Model				WZSV62K3M			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				yes			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				yes			
application: (low/medium)				medium			
climate: (colder/average/warmer)				average			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output	Prated	6	kW	Seasonal space heating energy efficiency	η_S	149,9	%
Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = -7°C	Pdh	5,0	kW	Tj = -7°C	COPd	3,06	-
Tj = +2°C	Pdh	3,0	kW	Tj = +2°C	COPd	3,97	-
Tj = +7°C	Pdh	2,0	kW	Tj = +7°C	COPd	4,63	-
Tj = +12°C	Pdh	1,2	kW	Tj = +12°C	COPd	4,86	-
Tj = bivalent temperature	Pdh	5,4	kW	Tj = bivalent temperature	COPd	2,84	-
Tj = operation limit temperature	Pdh	5,4	kW	Tj = operation limit temperature	COPd	2,84	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T _{biv}	-10	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	65	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0,002	kW	Rated heat output	P _{sup}	-	kW
Thermostat-off mode	P _{TO}	0,007	kW	Type of energy input	electrical		
Standby mode	P _{SB}	0,007	kW				
Crankcase heater mode	P _{CK}	0,009	kW				
Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m ³ /h
sound power level, indoors/outdoors	L _{WA}	44 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	1	m ³ /h
Emissions of nitrogen oxides	NO _x	-	mg/kWh				
For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	102	%
Daily electricity consumption	Q _{elec}	7,478	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Contact details	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

Model				WZSV62K3M			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				yes			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				yes			
application: (low/medium)				low			
climate: (colder/average/warmer)				average			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output	Prated	6	kW	Seasonal space heating energy efficiency	η_S	199,4	%
Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = -7°C	Pdh	5,0	kW	Tj = -7°C	COPd	4,37	-
Tj = +2°C	Pdh	3,1	kW	Tj = +2°C	COPd	5,24	-
Tj = +7°C	Pdh	2,0	kW	Tj = +7°C	COPd	5,92	-
Tj = +12°C	Pdh	1,3	kW	Tj = +12°C	COPd	5,95	-
Tj = bivalent temperature	Pdh	5,4	kW	Tj = bivalent temperature	COPd	4,15	-
Tj = operation limit temperature	Pdh	5,4	kW	Tj = operation limit temperature	COPd	4,15	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T _{biv}	-10	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	65	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0,002	kW	Rated heat output	P _{sup}	-	kW
Thermostat-off mode	P _{TO}	0,007	kW	Type of energy input	electrical		
Standby mode	P _{SB}	0,007	kW				
Crankcase heater mode	P _{CK}	0,009	kW				
Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m ³ /h
sound power level, indoors/outdoors	L _{WA}	44 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	1	m ³ /h
Emissions of nitrogen oxides	NO _x	-	mg/kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Contact details	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							